Saletto
Low Profile Panel Heater

Product Description

Advanced performance and stylish looks. This low profile panel heater is perfect for conservatories and other areas where wall space is limited.

Key Features

- Electronic thermostatic control
- Pre-set background temperature at 5ºC below thermostat setting
- Convected heat for rapid warm up
- Quiet operation
- Detachable hinged wall mounting frame

Technical Details

Power Controls	Soft touch on/off button. Indicators relate to power to the heater and element on.
Thermostat Controls	5-30ºC Lockable slider control
Plug in modules	RX24Ti—24hr digital timer RXPW1—Single zone pilot wire RXRBTI—Runback timer RX9913 required with MBS control system
Thermostat	Electronic type, accurate to +/-0.3ºC
Thermal Cut out	Automatic reset
Element	Compact, finned, mineral filled and sheathed for silent operation
Colour/ Finish	White / steel
IP Rating	IPX4
Approvals	CE and BEAB
Warranty	2 years

Dimensions

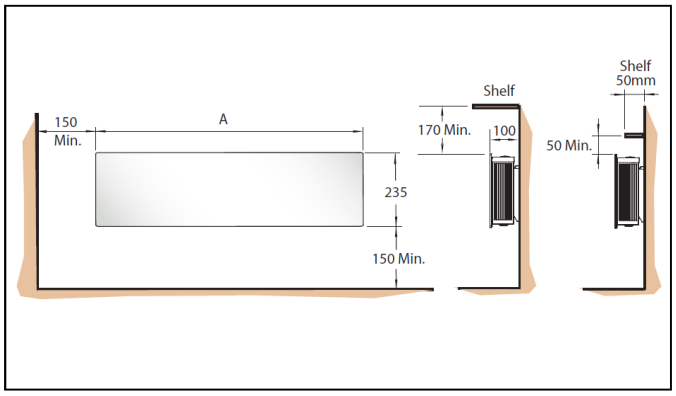

Model No.	Loading	Height mm	Width mm (A)	Depth mm	Fixing Points mm	Weight kg
LPP050	0.5kW	235	746	100	671	6.7
LPP075	0.75kW	235	746	100	671	6.7
LPP100	1kW	235	877	100	802	7.6
LPP150	1.5kW	235	1142	100	1067	9.9

Packaging Details

Model No.	Length	Height	Depth	Barcode
LPP050	794	317	166	5011139 046062
LPP075	794	317	166	5011139 046055
LPP100	925	317	166	5011139 046079
LPP150	1190	317	166	5011139 046086

Additional Information

Model No.	Ti	Hi	Pallet Quantity (2.4m high)
LPP050	7	5	35
LPP075	7	5	35
LPP100	6	5	30
LPP150	5	4	20

©2012 Dimplex UK Ltd